

Cirrus – Surface Mounted

Transforming Office lighting with LED

PHILIPS



Cirrus – Surface Mounted


Led Solution in surface mounting, Efficacy: 80 lm/w, Long Life



- Surface Mounted Led Luminaire offering a perfect combination of Innovative design and state of Art LED technology.
- Considerable Energy Savings : **50% Compared to 2xPLL 36w and 30% compared to 4xTL-514w**



Cirrus – Surface Mounted: High Efficacy, Maintenance free, Long Life Solution & Easy To Experience

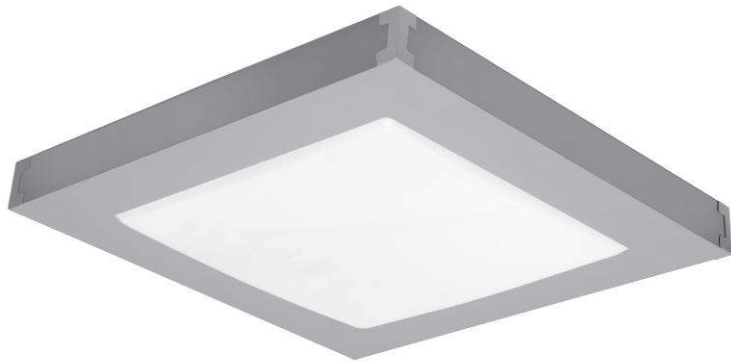

Performance : A perfect blend of the latest LED technology and efficient optics ensures perfectly uniform illumination and high Lumen/ watt (80)

Long-life: Controlled Design/ manufacturing ensures quality and use of long-life materials ensure Robust Product.


Simple and quick: Easy to Install without any specialized tools.

Fit and Forget : High efficiency, a long service life and almost complete freedom from maintenance significantly reduce operating costs.





Product Specifications

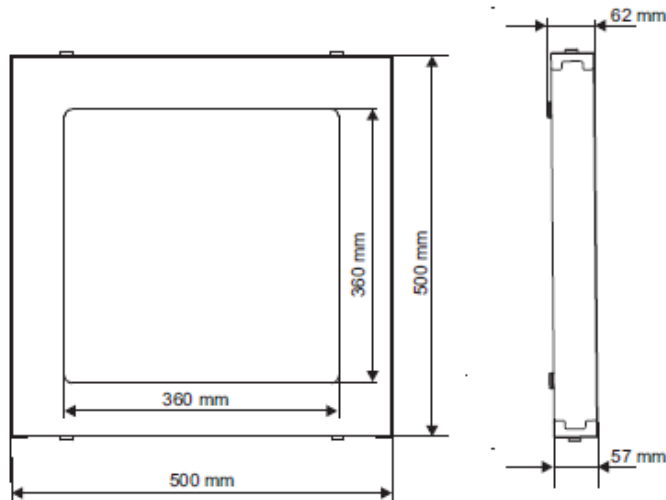

Type	Cirrus SM365C & SM366 C
Light source	LED Module
Wattage	40 Watt (System Wattage)
Luminous Flux	LED 33S : 3200 Lm
Color Temperature	5000 K
Efficacy Lm/w	> 80 Lm /w
Color Rendering Index	➤70
Driver	Electronic In-Built
Mains Voltage	220-240v , 50 / 60 Hz
Driver	Electronic In-Built PF > .9 , THD < 10% , IEC Compliant for Safety , Performance & EMI
Material	Housing : CRAC Housing, diffuser : high efficiency opal Dish Diffuser
Color	Grey
Maintenance	Luminire Sealed from Bottom. Open-able from front by removing the front cover after removing 4 thumb screws.
Installation	Surface Mounted For Concrete, True Ceiling or Wooden Board ceiling.
Applications	General Lighting In offices, circulations Areas

Applications


- Mid & Small offices
- Other Buildings with no false ceiling





How to read the Cat ref

SM365C LED33-5000 PSU OD GR

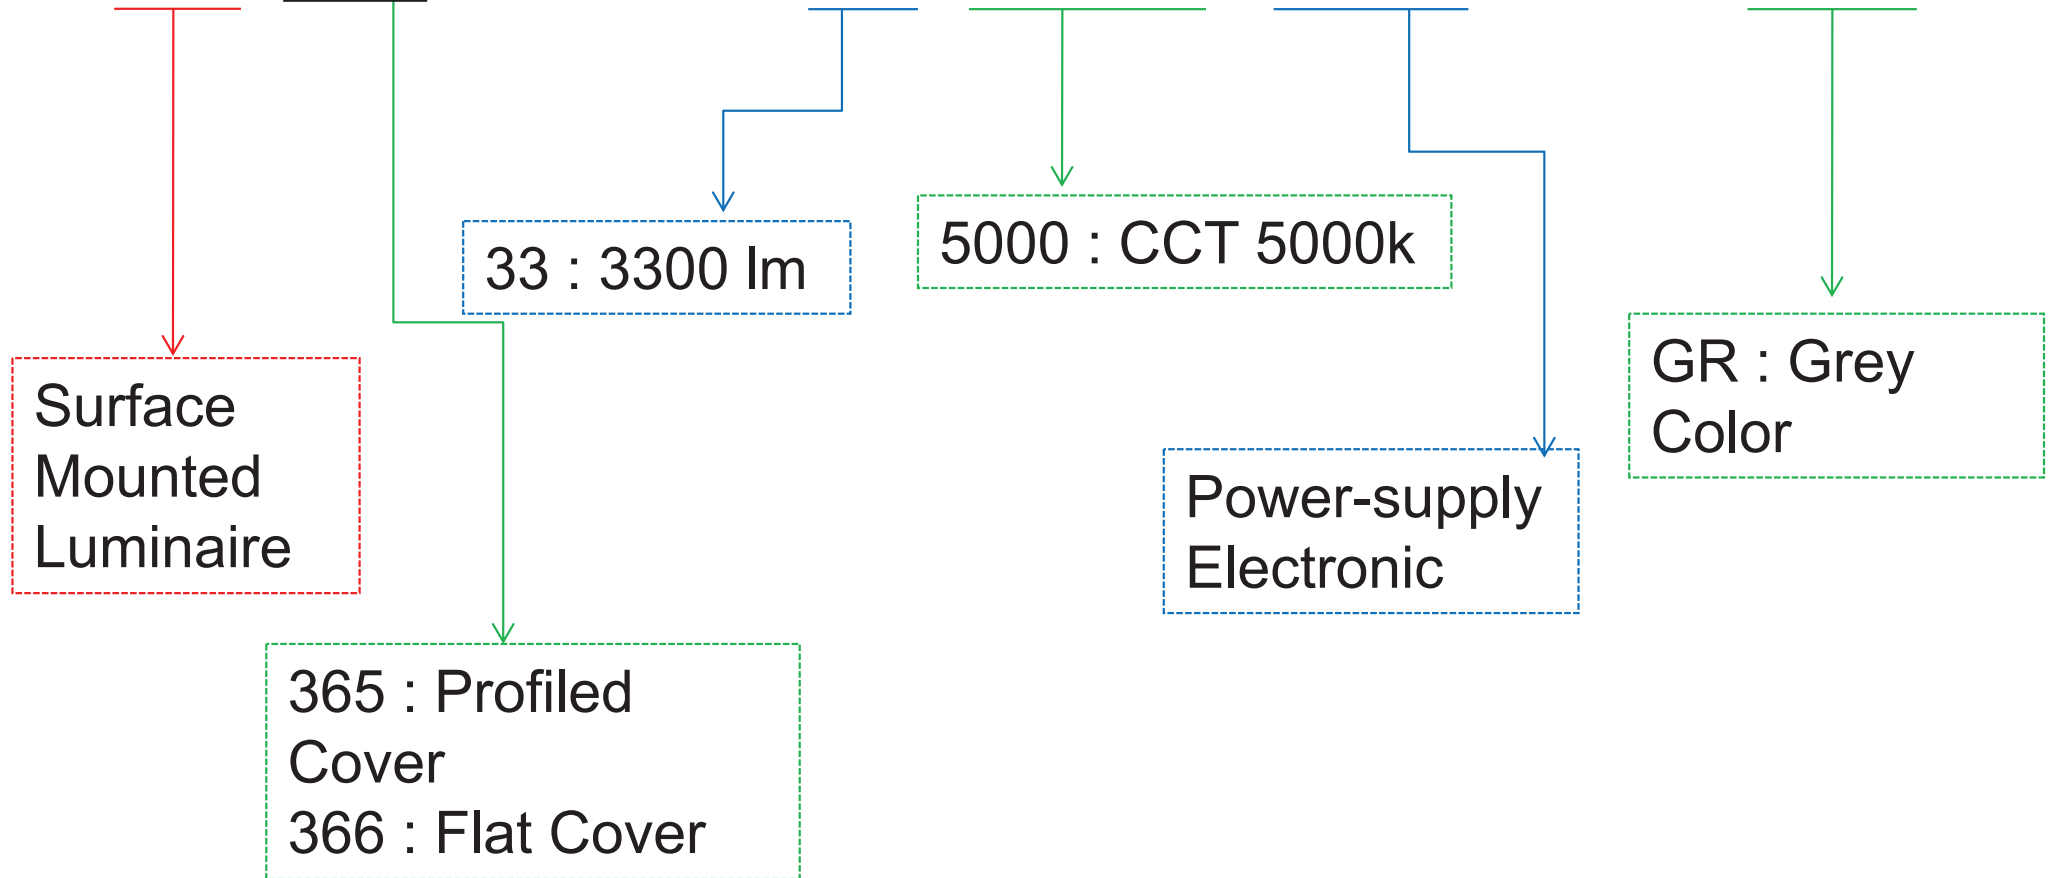



Installation Details

Installation Instructions

PHILIPS

CIRRUS

Surface



IEC 60598

IP20

NO REGULATOR

INDOOR

⚡ THIS LUMINAIRE MUST BE EARTHED

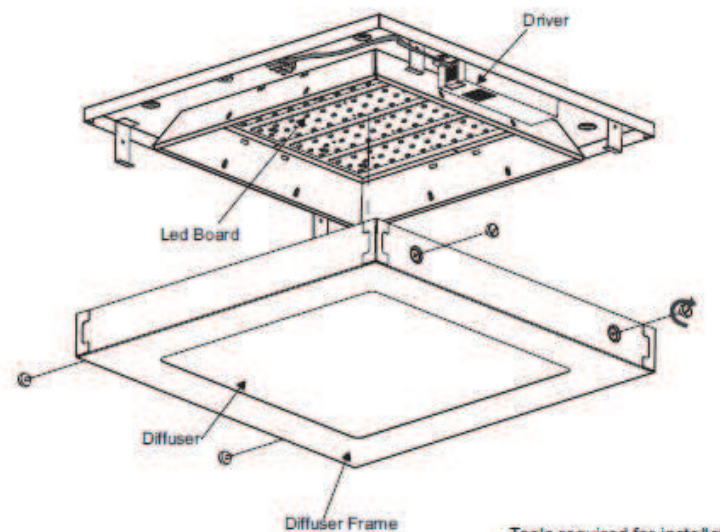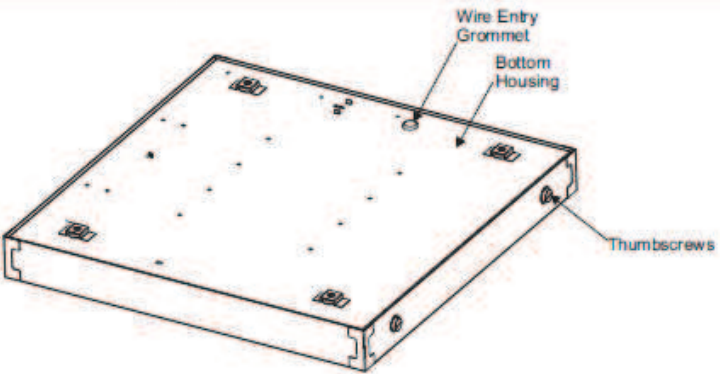


Wire Entry Grommet
Bottom Housing
Thumbscrews
Driver
Led Board
Diffuser
Diffuser Frame

Tools required for installation :
1 - Measuring Tape
2 - Drill machine
3 - Screw Driver
4 - Plastic Gloves

Open the Diffuser Frame for Maintenance of the Luminaire by removing 4 Nos.Thumbscrews.


Product Dimensions

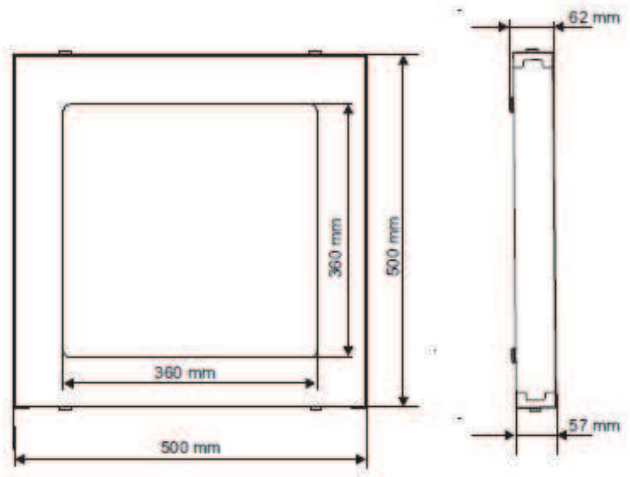

500 mm
360 mm
360 mm
500 mm
62 mm
57 mm

! ATTENTION: Install in accordance with national and local building and electrical codes.

Installation Details

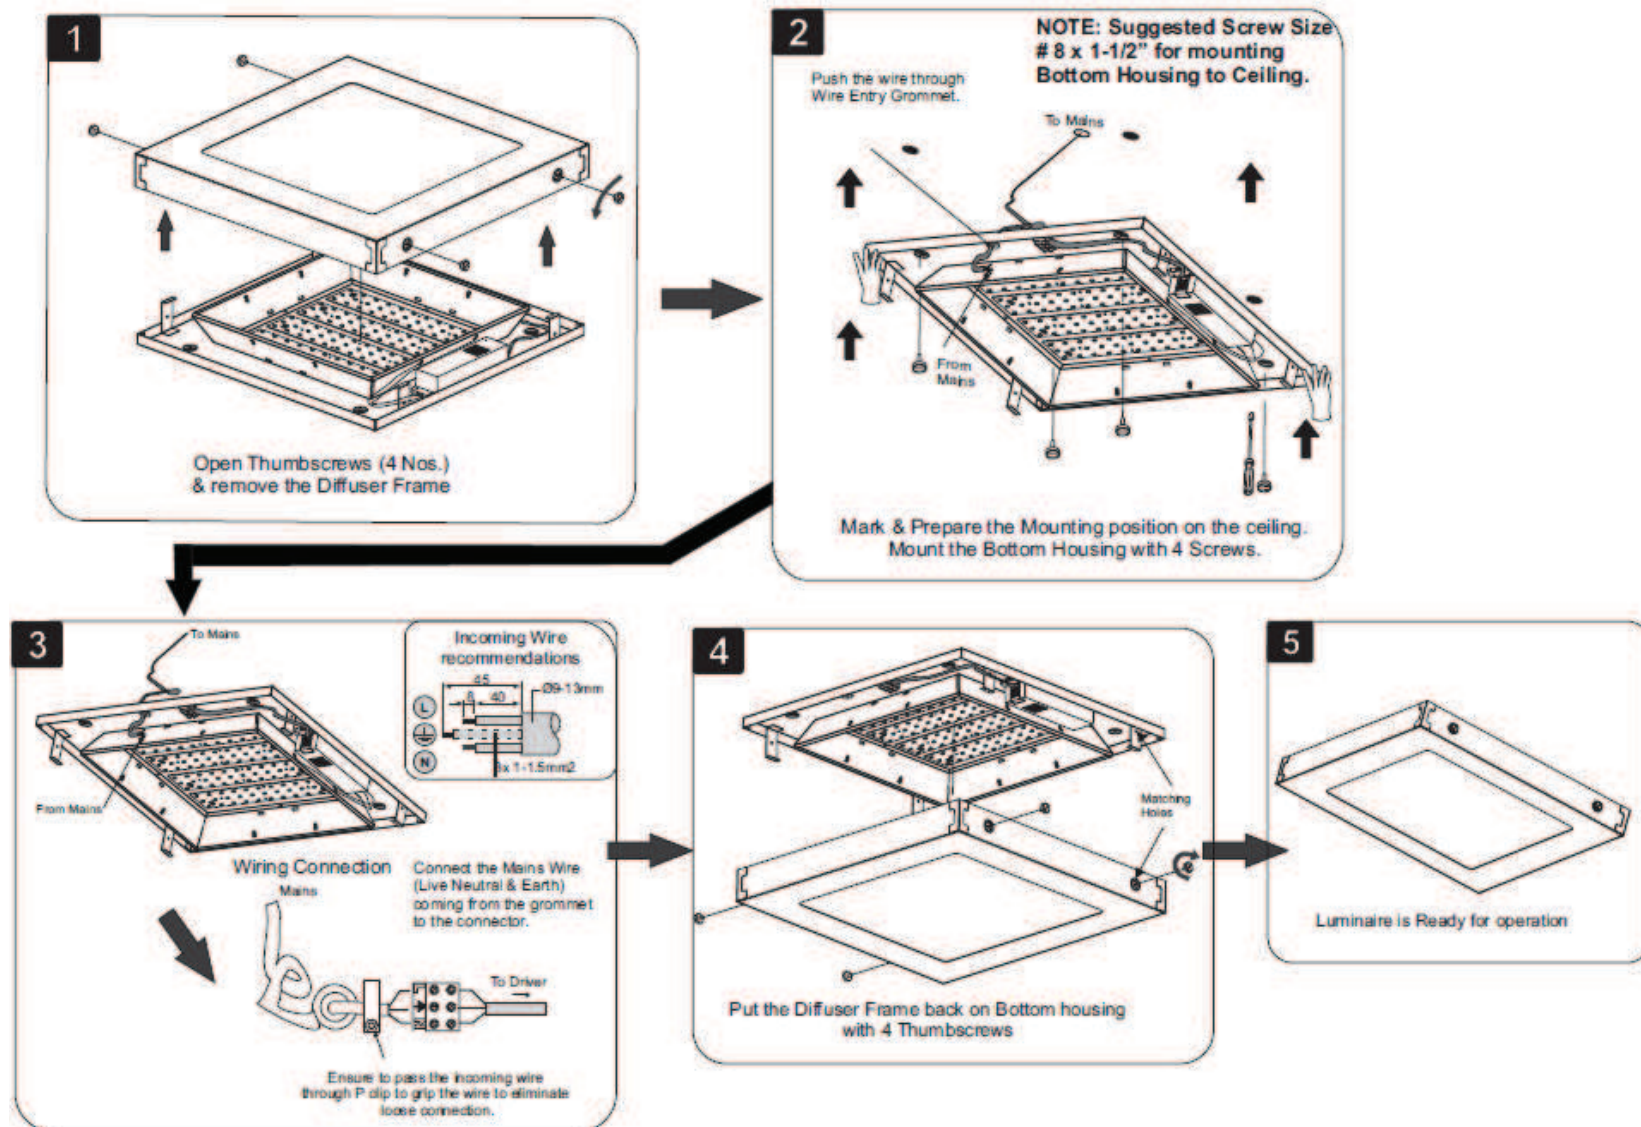



Ordering Data & technical Details

Technical Details			
TYPE	Nominal Voltage	Mains current	Nominal Power Factor
SM365C LED33-5000 PSU OD GR	240V	0.18 A	>0.9
SM366C LED33-5000 PSU OD GR	240V	0.18 A	>0.9

