

Smart Brite

36w 4000lumens Metal Batten

Positioning

- High Brightness 36w 4000lm batten for commercial applications
- Designed for parking spaces, go-downs and corridors/large spaces
- Delivers 110 lumen/watt efficiency


Key Specs

- 36w 4000lm aluminium batten
- Length 4 feet
- CRI > 80 for accurate colour rendering
- Robust metal construction for better heat dissipation and longer life
- Eye Comfort Technology with no blue light hazard
- CCT: 6500k (CDL), 4000k (NW)




Product Image

dissipation & long life

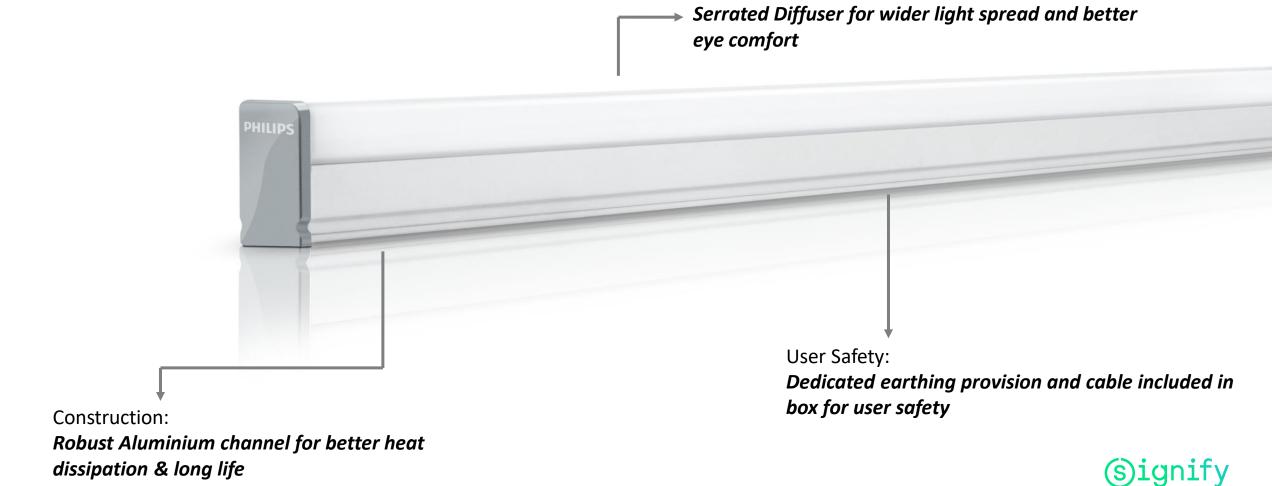

Diffuser:

Product Packaging

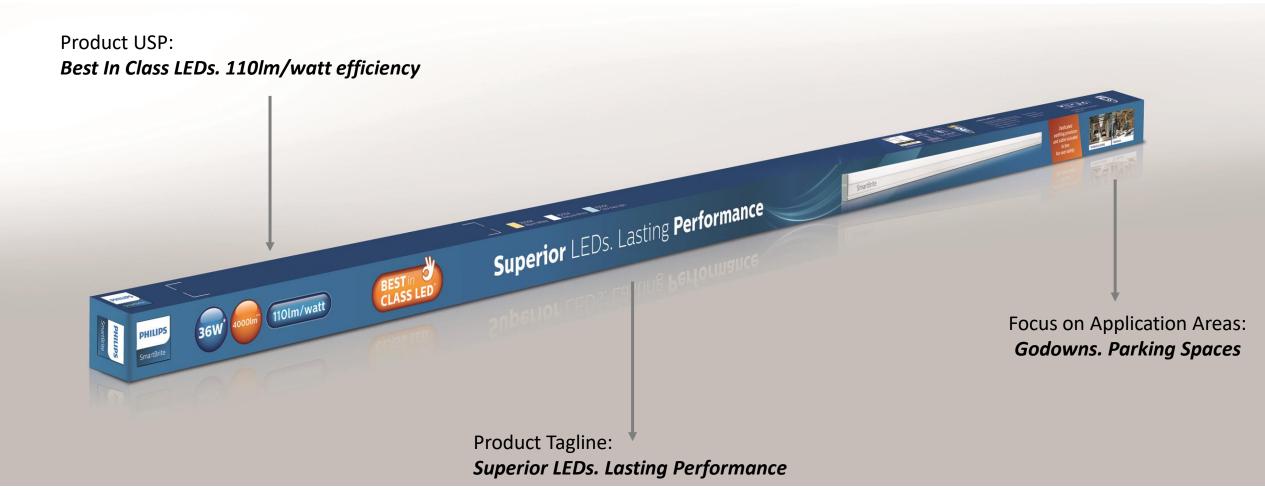



Specifications

Lumen Output	4000 Lm
System Wattage	36 W
Efficacy	>110lm/watt
CCT	6500K & 4000k
CRI	>80
Life Class	20,000 hrs @ 35°C ambient temperature
Mounting	Wall/Surface
Housing	Aluminum Extrusion
IP	IP 20
Luminaire compliance	Relevant LED IS standards
Operating temperature	Up to 35 deg C
PF	> 0.9
THD	< 30 %
Input voltage range	160V - 240V AC
diffuser	PC
Dimensions	1185mm X 22mm X 36mm (approx.)
Serviceability	Non Replaceable Driver



Ordering Code

12NC	Description
9195 158 13544	BN 021 LED40S- 6500 PSU GR
9195 158 13723	BN 021 LED40S- 4000 PSU GR

NSP	To be shared soon
MRP	To be shared soon



Signify